

3-in-1 Capabilities

- ✓ **REMOVE** coatings with precision
- ✓ **CLEAN** contaminants without waste
- ✓ **PREPARE** surfaces for better adhesion

The portable and rugged PlasmaBlast mobile unit (PB7000-M) is a one-of-a-kind technology that powers through the toughest and thickest coatings to meet your surface preparation and cleaning requirements.



* UNIQUE BENEFITS

- Perfect for tight spaces & remote locations
- Rugged design for forward-deployed environments
- Treated surfaces are prepared & ready for immediate use and/or re-coating with measurably better adhesion qualities
- Light weight allows for single-user carry and wide-ranging field applications



* APPLICATIONS FOR ALL MILITARY BRANCHES

- **SEALANT REMOVAL** : Eliminate the need for wet chemicals
- **REDUCED REPAIR TIMES** Expedited valve flange repair; Precise non-skid removal
- **STRUCTURAL RETROFIT**: Reduced prep time
- **BATTLE DAMAGE ASSESSMENT**: Quickly classify damage to inform repair activities
- **WELD INSPECTION**: Decrease time spent from hours to minutes



The PlasmaBlast PB7000-M has unlimited NAVSEA Technical Warrant Holder (TWH) approval for use on all surface ships and carriers, and is approved for use on submarines with some limitations.







The PB7000-M is available for purchase on the GSA Advantage website

Technical Information

Model numbers available:
 PB7000-M-24
 PB7000-M-48
 PB7000-M-24CE

Dimensions	12" x 14" x 22"	31 cm x 36 cm x 56 cm	
Weight	40 lbs	18.1 kg	
Plasma Cable Length	20 ft	6.1 meters	
Operating Temperature	14°F to 115°F	-10°C to 46°C	
Operating Sound Level	~90 dBa		
Input Compressed Air Pressure	80-100 psi	550-690 kPa, 5-7 bar	
Optimal Input Compressed Air Flow	3.5 CFM	99 SLM	
Rated Pressure	120 psi	827 kPa, 8 bar	
Input Voltage	208-240 VAC, 50-60Hz, single-phase	208-240 VAC CE, 50-60Hz, single-phase	440-480 VAC, 50-60Hz, 3-phase
Input Current	18 Amps	14.5 Amps	6 Amps
Default Plug Type	unterminated		
EMC Status	Class A Group 2		
Degree of protection	IP 52		

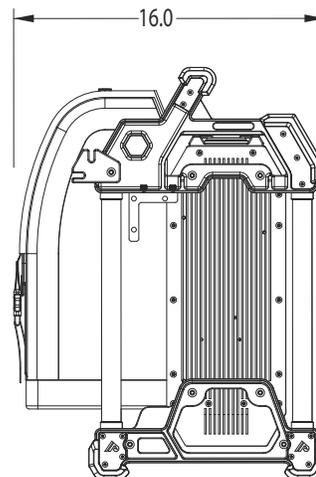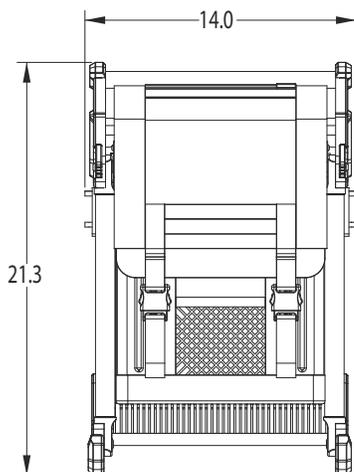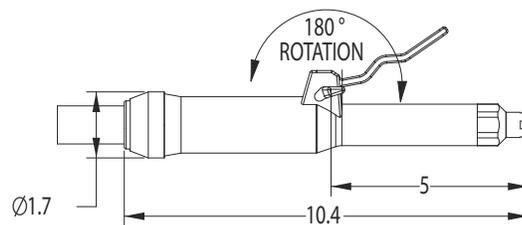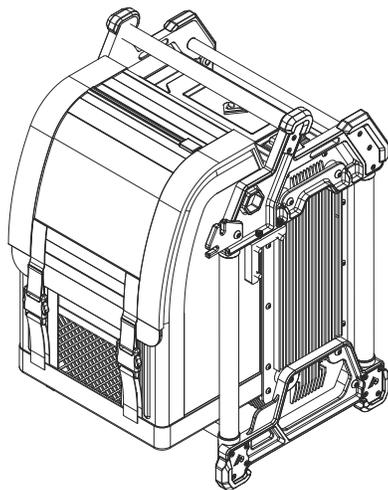

Dimensions are in inches, not to scale.

070825-PBST